




## DATA SHEET

### DIN EN 856 4SH

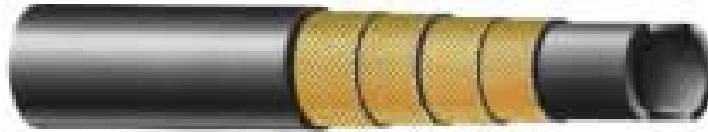

#### Hose Construction:

Tube: oil resistant synthetic rubber  
Reinforcement: four high tensile steel wire spiral layers  
Cover: abrasion and weather resistant synthetic rubber  
Temperature Range: -40°C to +100°C (+120°C max)

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
¾	19	19.0	28.4	32.2	420	1000	1680	280	1.53	004H/N-12
1	25	25.4	35.2	38.7	380	910	1520	340	2.06	004H/N-16
1-1/4	31	31.8	41.9	45.5	345	830	1380	460	2.46	004H/N-20
1-1/2	38	38.1	48.8	53.5	290	700	1160	560	3.35	004H/N-24
2	51	50.8	63.2	68.1	250	600	1000	700	4.35	004H/N-32

Lengths in accordance to EN-specification