




DATA SHEET

SEMPERJET 220 BAR

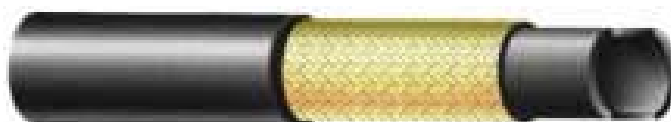

Hose Construction:

- Tube: synthetic rubber, resistant against usual detergents (pH-value 0-14)
- Reinforcement: one high tensile steel wire braid
- Cover: abrasion and weather resistant synthetic rubber, pin-pricked
- Temperature Range: -40°C to +155°C (+310°F max)

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
SEMPERJET 1 ST										
5/16	8 L	7.9	12.7	17.5	220	510	850	115	0.33	
3/8	10 L	9.5	15.1	19.8	220	435	720	130	0.40	
SEMPERJET 1 SN										
¼	6	6.4	11.1	13.4	250	540	900	100	0.21	0001-04
5/16	8 L	7.9	12.7	15.0	220	510	850	115	0.24	0001-05
3/8	10 L	9.5	15.1	17.4	220	435	720	130	0.33	0001-06
½	12	12.7	18.3	20.6	220	385	640	180	0.41	0001-08
SEMPERJET 1SN-K										
¼	6	6.4	10.2	12.0	250	600	1000	60	0.18	
5/16	8	7.9	12.0	14.0	250	600	1000	65	0.22	
3/8	10	9.5	13.7	16.5	250	600	920	75	0.29	
SEMPERJET special										
¼	6	6.4	10.2	12.0	210	500	850	50	0.18	
5/16	8	7.9	11.8	14.0	315	750	1250	110	0.33	

Lengths: multiples of 10m