




DATA SHEET

SEMPERJET 400 BAR

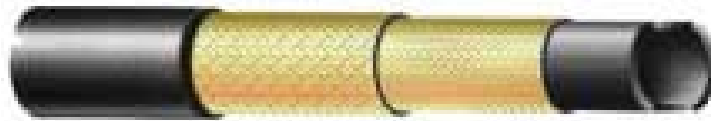

Hose Construction:

Tube: synthetic rubber, resistant against usual detergents (pH-value 0-14)
 Reinforcement: two high tensile steel wire braid
 Cover: abrasion and weather resistant synthetic rubber, pin-pricked
 Temperature Range: -40°C to +155°C (+310°F max)

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
SEMPERJET 2 ST										
5/16	8 L	7.9	14.3	19.1	400	840	1400	115	0.47	
3/8	10 L	9.5	16.7	21.4	400	795	1320	130	0.60	
SEMPERJET 2 SN										
¼	6	6.4	12.7	15.0	400	960	1600	100	0.21	0002-04
5/16	8 L	7.9	14.3	16.6	400	840	1400	115	0.24	0002-05
3/8	10 L	9.5	16.7	19.0	400	795	1320	130	0.33	0002-06
½	12	12.7	19.8	22.2	400	660	1100	180	0.41	0002-08
SEMPERJET 2 SN-K										
5/16	8	7.9	12.7	15.0	420	1000	1680	70	0.34	
3/8	10	9.5	15.1	17.4	400	900	1520	90	0.44	

Lengths: multiples of 10m