




TF-PTFE-C CONVOLUTED PTFE STAINLESS STEEL BRAIDED HOSE

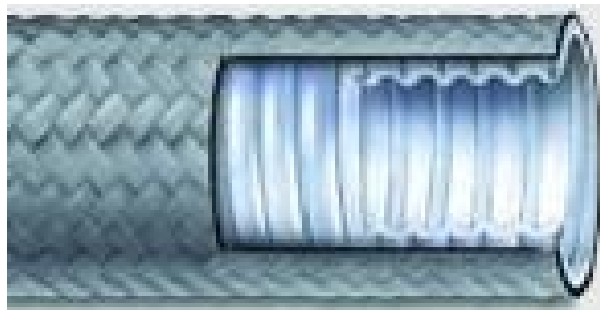


part number			size											List Price £/mt.
	ID			OD	Max WP		Min BP		Min BR		Weight (approx)			
	in	mm		mm	bar	psi	bar	psi	mm	inch	Kg/m	lb/ft		
TF-PTFE-04-C	1/4"	6.4	04	12.3	172	2500	517	7500	18	0.709				
TF-PTFE-06-C	3/8"	9.5	06	15.3	138	2000	414	6000	20	0.787				
TF-PTFE-08-C	1/2"	12.7	08	18.8	103	1500	310	4500	25	0.984				
TF-PTFE-10-C	5/8"	16.0	10	22.1	83	1200	248	3600	51	2.008				
TF-PTFE-12-C	3/4"	19.0	12	24.7	69	1000	207	3000	64	2.520				
TF-PTFE-16-C	1"	25.4	16	32.8	46	667	138	2000	89	3.504				
TF-PTFE-20-C	1.1/4"	31.8	20	40.7	34	500	103	1500	127	5.000				
TF-PTFE-24-C	1.1/2"	38.1	24	48.3	30	435	90	1305	152	5.984				
TF-PTFE-32-C	2"	50.8	32	59.7	23	333	69	1000	200	7.874				

Recommended Ferrule





TF-PTFE PTFE STAINLESS STEEL BRAIDED HOSE

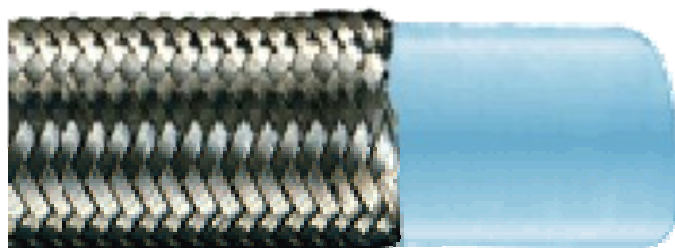

part number	ID		size	OD	Max WP		Min BP		Min BR		Weight (approx)		List Price £/mt.
	in	mm			bar	psi	bar	psi	mm	inch	Kg/m	lb/ft	
	TF-PTFE-03	3/16"	4.8	03	7.9	276	4000	828	12000	51	2.992		
TF-PTFE-04	1/4"	6.4	04	9.4	224	3250	672	9750	76	4.016			
TF-PTFE-05	5/16"	8.0	05	11.1	207	3000	621	9000	102	5.000			
TF-PTFE-06	3/8"	9.5	06	12.7	183	2660	552	8000	127	5.984			
TF-PTFE-08	1/2"	12.7	08	16.6	161	2330	483	7000	152	7.008			
TF-PTFE-10	5/8"	16.0	10	19.8	114	1660	345	5000	178	7.992			
TF-PTFE-12	3/4"	19.0	12	23.0	103	1500	310	4500	203	12.008			
TF-PTFE-16	1"	25.4	16	29.3	80	1160	241	3500	305				

Recommended Ferrule

