




DATA SHEET

DIN EN 856 / SAE 100 R13

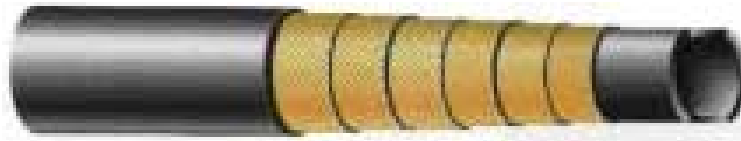

Hose Construction:

Tube: oil resistant synthetic rubber
 Reinforcement: upto 1" four, from 1-1/4" six high tensile steel wire spiral layers
 Cover: abrasion and weather resistant synthetic rubber
 Temperature Range: -40°C to +121°C

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
¼	6	6.4	16.7	20.6	776	1860	3100	127	0.93	0013-04
3/8	10	9.5	19.8	23.8	690	1660	2760	152	1.10	0013-06
½	12	12.7	23.1	27.0	517	1240	2070	200	1.35	0013-08
¾	19	19.0	29.2	32.0	345	830	1380	240	1.65	0013-12
1	25	25.4	34.9	39.2	345	830	1380	300	2.25	0013-16
1-1/4	31	31.8	46.8	49.8	345	830	1380	420	3.60	0013-20
1-1/2	38	38.1	54.0	57.3	345	830	1380	500	4.75	0013-24
2	51	50.8	68.4	71.9	345	830	1380	630	6.90	0013-32

Lengths in accordance to EN-specification