




DATA SHEET

DIN EN 856 / SAE 100 R13

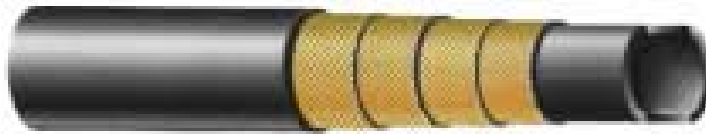

Hose Construction:

Tube: oil resistant synthetic rubber
Reinforcement: upto 1-1/4" four, 1-1/2" six high tensile steel wire spiral layers
Cover: abrasion and weather resistant synthetic rubber
Temperature Range: -40°C to +121°C

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
3/8	10	9.5	20.3	23.3	414	827	1655	153	0.77	0013-06
½	12	12.7	24.0	26.8	414	827	1655	203	0.92	0013-08
¾	19	19.0	32.9	36.1	414	827	1655	267	1.50	0013-12
1	25	25.4	38.9	42.9	414	827	1655	330	2.10	0013-16
1-1/4	31	31.8	48.4	51.5	414	827	1655	445	3.60	0013-20
1-1/2	38	38.1	56.3	59.6	414	827	1655	533	5.10	0013-24

Lengths in accordance to EN-specification